
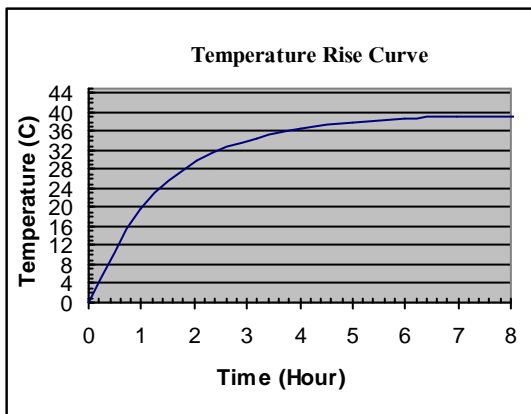


Specification : Transformer & Power Supply for Electronics Security Type.

Model : CV-05S
Introduce

Electronic security system is very important today because a system can help you in monitoring, detecting or controlling things in the area of a running system but electronic security system must work 24 hours for such purposes we much needed in the selection of high quality equipment used in the system for performance optimization.

PPCTECH Co.,Ltd. is produced about transformer, power supply, adaptor for electronic security system we specifically designed for use 24 hours we design and support power supply to a company with a leading system integration company in Thailand we supply adaptor power supply to distributors of CCTV camera brand American, Europe and Japan.

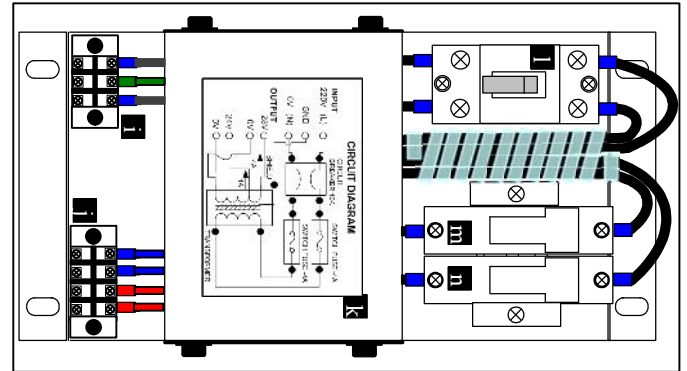

Model: CV-05S On 25 °C Ambient

Power Supply for Electronic Security System may be used in a different by depending on the electrical properties of equipments such as cameras which use the adaptor of AC and DC, access control use power supply /with charger because they want battery backup and supply to other equipments such as reader, magnetic lock, finger scan, fire alarm system need to power supply for difference current for difference side if you need to power supply for other equipment please contact us from telephone or E-mail as below.

Design Principles

Electronic security system that demands high stability, equipment used in the system must have high quality and good compatibility if some equipments do not have the quality it's effect to the system was not stable.

Many system integrators may see transformer, adaptor power supply is less important in the system but actually, these equipments are also important as well. Because if they do not have quality equipment will make no quality system although the use of other equipments high quality.

PPCTECH Co., Ltd.'s products quality and specializes for transformers and power supply to use for the actual environment we select quality electronic part to products adaptor power supply and design for low magnetic flux density transformer to reduce residual magnetism so transformer is less heat and long life more than transformer in general.


Transformer Design Equation

$$N_p = \frac{V_{in}}{4.44 f B A}$$

$$N_s = \frac{V_{out}}{4.44 f B A}$$




N_p :	Primary Turn Turn.
N_s :	Secondary Turn Turn.
f :	Line Frequency Hz.
V_{in} :	AC. Input Voltage Volt.
V_{out} :	AC. Output Voltage Volt.
B :	Flux Density Wb/mm. ²
A :	Cross Section Areas m. ²

Transformer design will set B : Flux density low or set turn of transformer more than general transformer for reduce residual magnetism of transformer so transformer is less heat than transformer in general.

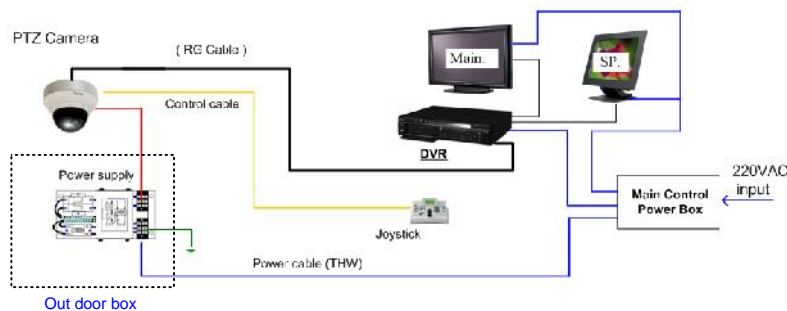


CCTV. system diagram

Specification : AC to AC power supply Electronic Security Type.

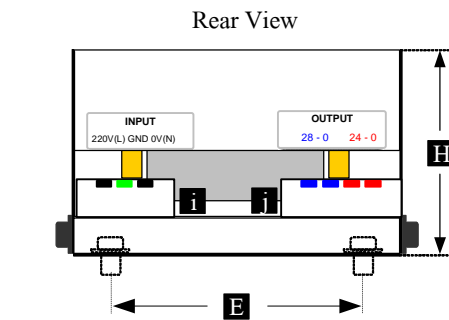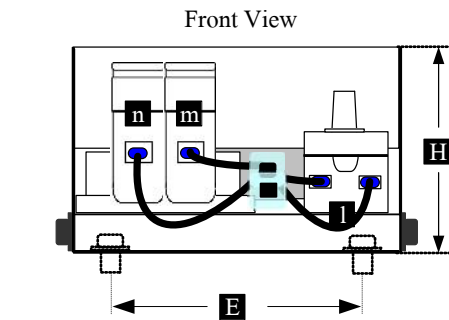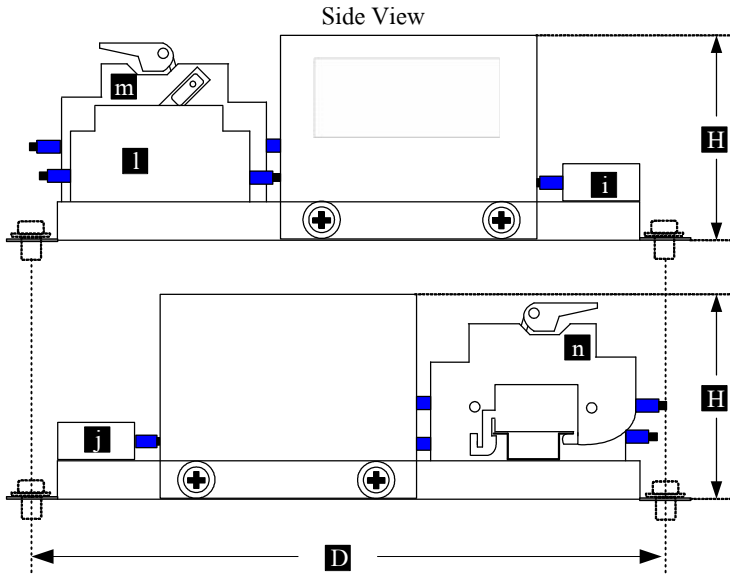Model : CV-05S


Character	Description	Unit mm/inch
i	Input Terminal 220V(L)-GND-0V(N)	-
j	Output Terminal (28-0V, 24-0V)	-
k	Circuit Diagram of Product	-
l	Circuit Breaker 10A.	-
m n	Switch Fuse with Fuse 4A.	-

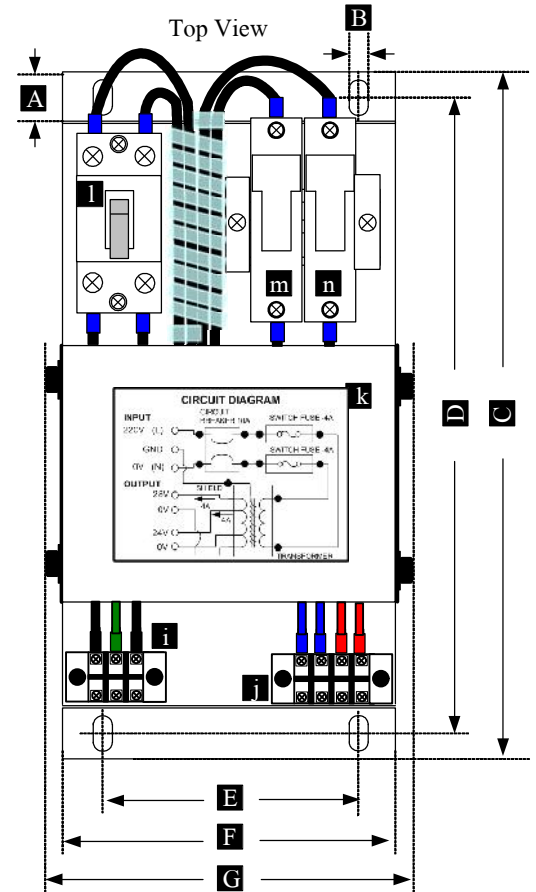

Character	Description	Unit mm/inch
A	Product Dimension	20 /0.79
B	Product Dimension	8/0.32
C	Product Dimension	270/9.62
D	Product Dimension	250/9.84
E	Product Dimension	100/3.94
F	Product Dimension	130/5.12
G	Product Dimension	140/5.52
H	Product Dimension	80/3.15

Product Specifications

Input Voltage :	210~245 Vac., 500 mA 50 Hz.
Output Voltage :	24-0, 28-0 Vac., 50 Hz.
Output Current :	4.0 A. (3A Continuous)
Output Power (VA) :	96 VA.
Flux density :	1.16 Wb/m ²
Short-Circuit Protection :	Input FuseX2, Circuit Breaker
Temperature Rise :	39 °C.
Steady State Times :	10.12 mS.
Dimensions :	140 mm/5.51" X 270 mm/10.62" X 80 mm/3.15".
Weight :	3.0 kg.
Ambient Operating Temp. :	0-55 °C.
Input Connection :	Terminal
Output Connection :	Terminal

- Power consumptions must not exceed 72 watts when used at all times (24 Hr).
 - Product design for Outdoor PTZ. Camera

Customer Confirmed

Company logo Sealed	Approved by :
	Position :